


**BENEFITS:**

- Lasts longer in power hungry devices
- Reliable portable power

**APPLICATIONS BEST FOR:**



**OTHER DETAILS:**

- Alkaline Manganese Dioxide chemistry
- Average weight: 48g

**ELECTRICAL CHARACTERISTICS**

Test Items	Test Conditions 25 ± 2°C 60 ± 15%RH	Specification (Volt), min			
		3 months	1 year	3 years *	5 years*
OCV		9.55V	9.30V	9.10V	8.90V
CCV	47Ω, 0.3 s	8.65V	8.00V	7.70V	7.30V



**DISCHARGE CAPACITY**

Test Items	Test Conditions 25 ± 2°C 60 ± 15%RH (EV=End Voltage)	Specification (Hours), mean			
		3 months	1 year	3 years*	5 years*
Duration	270 Ω Intermittent 1 h/d EV=5.40V	20.5	20.2	18.7	16.7
	620 Ω Intermittent 2 h/d EV=5.40V	49.0	47.5	45.0	44.0
	10 kΩ background 24 h/d, 620 Ω 1 s/h pulse EV=7.50V	Specification (Days), mean			
		20.0	19.5	18.5	17.5

\* Storage performance is estimated.



- GP Ultra Alkaline Battery
- 9 Volts

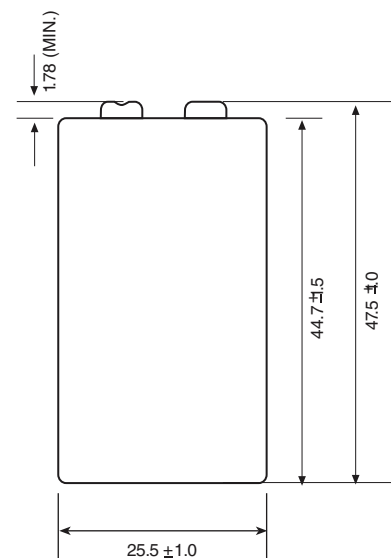

Unit : mm