



PS-121100 12 Volt 110.0 AH Rechargeable Sealed Lead Acid Battery




Features



- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Detachable ABS carrying handle
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

Terminals (mm)

- T11 - THREADED INSERT - 8mm STUD



Physical Dimensions: in (mm)



L: 13.00 (330) W: 6.73 (171) H: 8.35 (212) HT: 8.66 (220)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Performance Specifications

Nominal Voltage	12 volts (6 cells)
Nominal Capacity	
20-hr. (5.5A to 10.50 volts)	110.0 AH
10-hr. (10.3A to 10.50 volts)	103.0 AH
5-hr. (17.7A to 10.20 volts)	88.5 AH
1-hr. (61.8A to 9.00 volts)	61.8 AH
15-min. (204A to 9.00 volts)	51.0 AH
Approximate Weight	69.50 lbs. (31.52 kg)
Energy Density (20-hr. rate)	1.81 W-h/in ³ (110.26 W-h/l)
Specific Energy (20-hr. rate)	18.99 W-h/lb (41.87 W-h/kg)
Internal Resistance (approx.)	5 milliohms
Max Discharge Current (7 Min.)	330.0 amperes
Max Short-Duration Discharge Current (10 Sec.)	825.0 amperes
Shelf Life (% of nominal capacity at 68°F (20°C))	
1 Month	97%
3 Months	91%
6 Months	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-40°F (-40°C) to 140°F (60°C)
Case	ABS Plastic
Power-Sonic Chargers	n/a


Constant Power Discharge Ratings

MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C						
		5 MIN	10 MIN	15 MIN	20 MIN	30 MIN	45 MIN	60 MIN
PS-121100	1.75	655	470	365	304	225	164	133
	1.70	692	490	375	312	231	168	134
	1.67	706	500	380	315	233	170	135

Discharge Time vs. Discharge Current

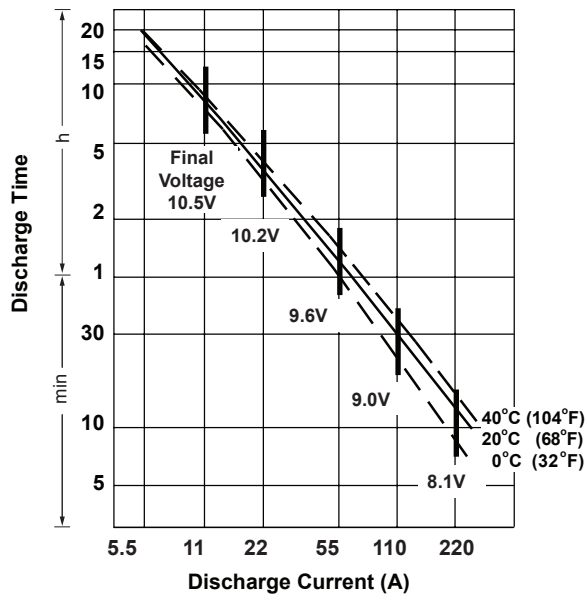

Discharge Characteristics

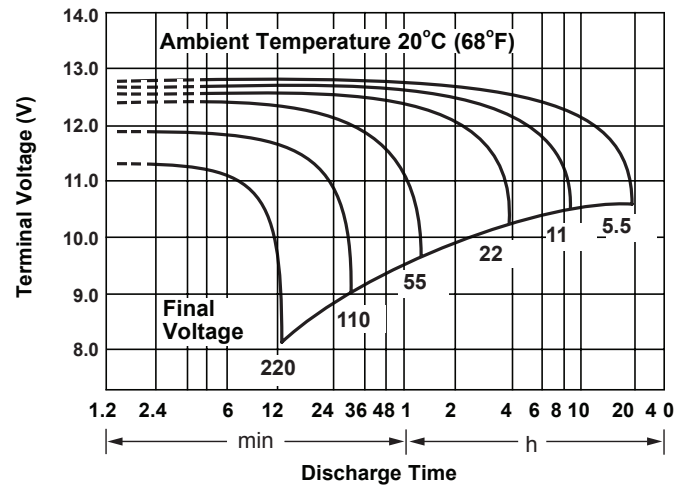

Charging

Cycle Applications: Limit initial current to 20A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 1.1A. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.


"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

Shelf Life & Storage

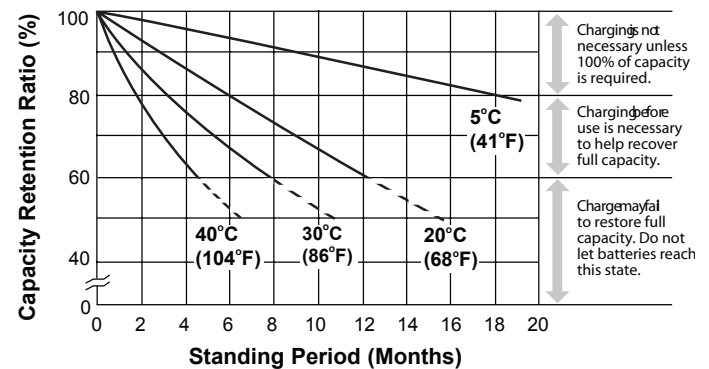

Further Information

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

Contact Information

Distributed by:
MICROBATTERY.COM, 7350 NW 35th Terrace, Miami, Florida 33122
 Customer Service: 1-866-999-2355 | Phone: 1-305-371-9200 | Fax: 1-305-371-9400
www.microbattery.com